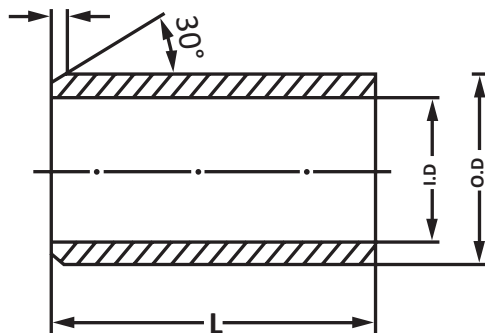


Dimensions

O.D.	I.D.	L.
20	16	10
		15
		20
		25
		30

O.D.	I.D.	L.
40	35	25
		30
		40
		50
		60

22	18	10
		15
		20
		25
		30

45	40	30
		40
		50
		60
		80

24	20	10
		15
		20
		25
		30

55	50	40
		50
		60
		80
		90

28	24	10
		15
		20
		25
		30

60	55	50
		60
		80
		90
		100

30	25	10
		15
		20
		25
		30

65	60	50
		60
		80
		90
		100

35	30	20
		25
		30
		40
		50

75	70	50
		60
		80
		90
		100

O.D.	I.D.	L.
85	80	50
		60
		80
		90
		100

Material 50CrV4 DIN17221-1988

Element	C	Cr	Mn	V	Si
Composition	0.47-0.55	0.9-1.2	0.7-1.1	0.1-0.2	0.15-0.4

Hardness	HRC42-48
Max. Static Load	650N/mm ²
Max. Dynamic Load	100N/mm ²
Max. Speed	0.1m/s
Max. Temperature	200°C
Friction Coefficient (oil)	≤0.18

